



INVERTER

Rex Series



Standard Features



Universal Warranty



Turbo



World-Famous
Compressor

Optional Features

Optional Features



Additional Filters




Outdoor Chassis
Electric Heater



Smart

High Density Filter

Anti Corrosive Go

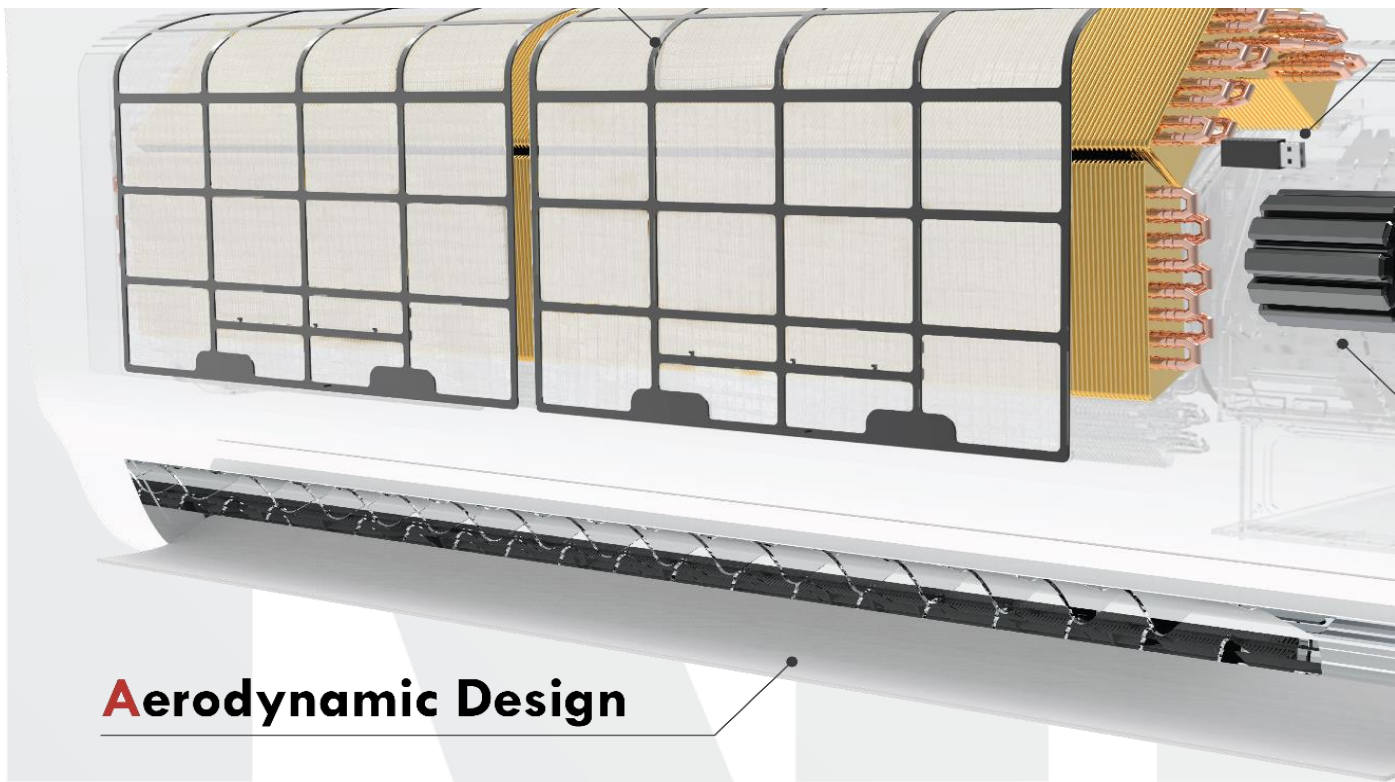

Aerodynamic Design




Rex Series A++
R32 Ductless Split Type DC Inverter
Designed For European Union

Producer	
Operation	
Description	
Type	
Power supply	
Control type	
Filter type	
Heat exchangers	
Warranty	
Declared cooling capacity	W
Declared heating capacity	W
Pdesignc	W
SEER declared	W/W
Energy Class	
Pdesignh Average	W
SCOP Average declared	W/W
Energy Class(Average)	
Declare capacity(-10℃)	W
Back up heating capacity(-10℃)	W
Moisture removal	Liters/h
Indoor sound power(S/H/M/L/Mute)	dB(A)
Outdoor sound power	dB(A)
Indoor sound pressure(S/H/M/L/Mute)	dB(A)
Outdoor sound pressure	dB(A)
Power supply	

Power supply side		
Voltage Range		V
Operating current	Cooling	A
	Heating	A
Power consumption	Cooling	W
	Heating	W
Refrigerant type		
Compressor	Type	
	MFG	
Indoor air circulation	Cooling/heating	m ³ /h
Indoor fan type		
Indoor fan speed Super/High/Mid-HighMiddle/Low-Mid/Low/Mute	Cooling	rpm
	Heating	rpm
	Dry	rpm
Outdoor fan type		
Outdoor air circulation		m3/h
Outdoor fan speed S/H/M/Low/Mute	Cooling	rpm
	Heating	rpm
Connecting Wiring	Core x Size	
Expension device		
Connecting Pipe	Gas	Inches
	Liquid	Inches

Application area		m ²
Max. refrigerant pipe length		m
Max. difference in level		m
Operation temperature range		℃
Ambient temperature range	Outdoor	℃
	Indoor	℃
Net dimensions (W x H x D)	Indoor	mm
	Outdoor	mm
Net weight	Indoor	kg
	Outdoor	kg
Packing dimensions (W x H x D)	Indoor	mm
	Outdoor	mm
Gross weight	Indoor	kg
	Outdoor	kg
Loading Quantity w/o pipe	40'HQ	

1. Warranty: 5 years for compressor, 2 years for units
2. 1% free spare parts of total amount with shipment (For normal order of one container)
3. Payment term: 30% TT as deposit before production , balance 70% by T/T before
4. Delievery: Within 45 days after receipt TT deposit
5. Trade term: FOB XL PORT GD

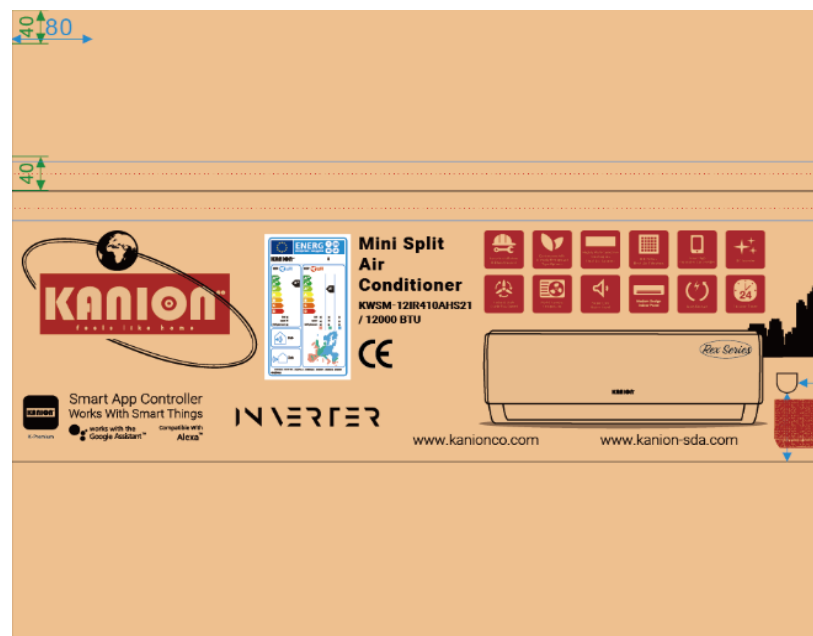



Suitable for Every House

Easy to Install and Maintain

Energy Saving - Economy for People and the Environment

Comfort, Safety and Healthy Living with Kanon

5 Year for Compressor and 2 Years for Parts, Kanon



works with
Google Ass



High Density
Filter



Golden Fin




Self Cleaning



Smart Features

Golden Fin

Smart App

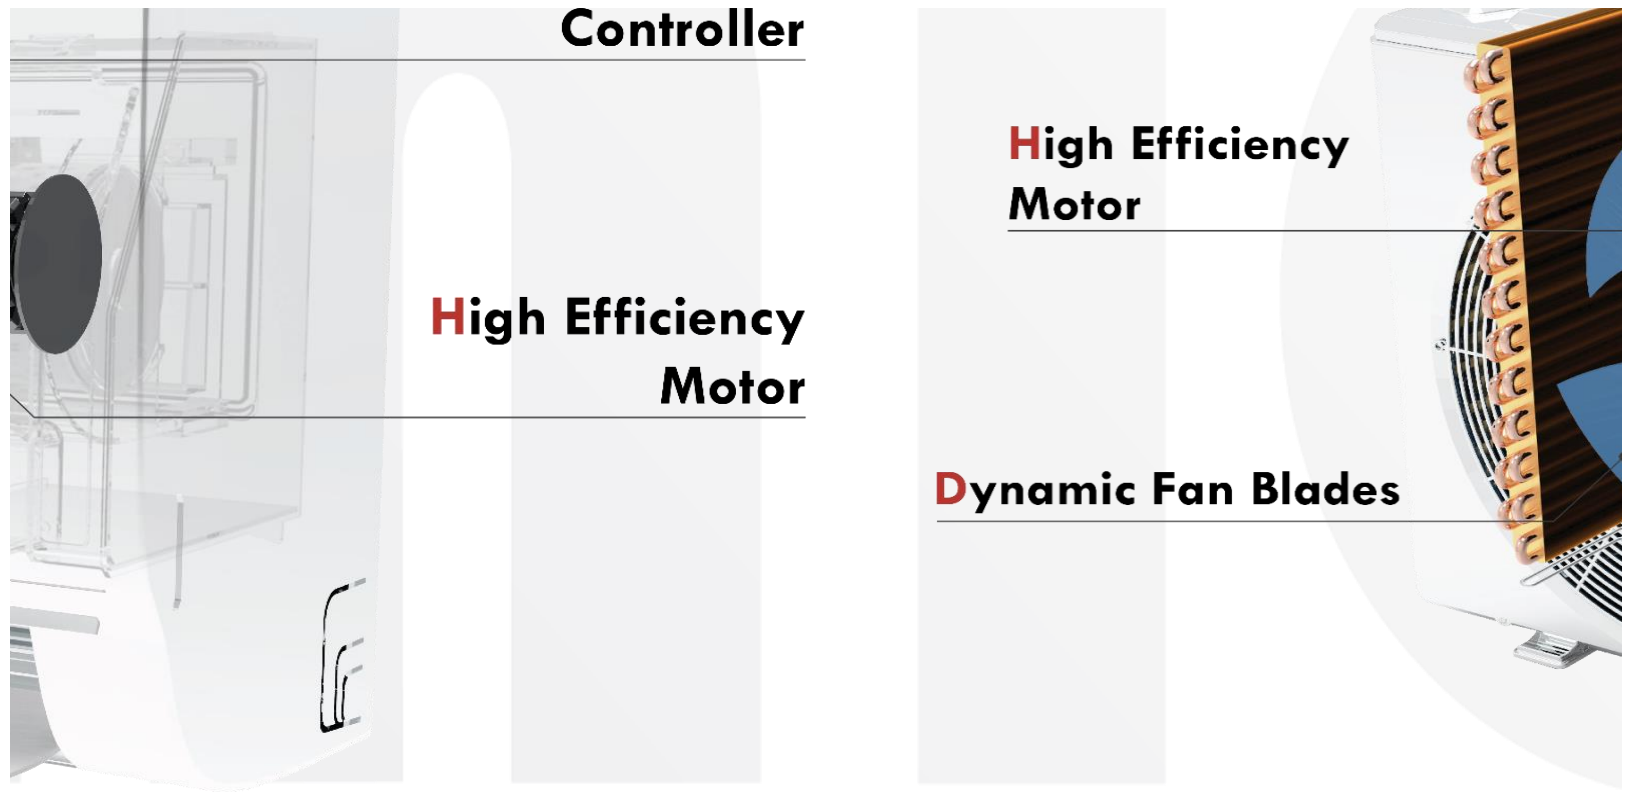

Controller

**High Efficiency
Motor**

**High Efficiency
Motor**

Dynamic Fan Blades

*

<https://www.kanionco.com>

er 50Hz

General Specifications	
KWSM-09IR32HF	KWSM-12IR32HF
Kansai Electric Industry Co., Ltd.	
Cooling,Heating,Dehumidifying	
Ductless Split Type	
Cooling 8~12.5kw	
220v-240v	
Remote Controller (Standard) / Smart App Controller (Optional)	
Top-opened Filter, Reinforced	
Golden fin anticorrosion	
24 months for units / 5 years for parts	
2600(940~3300)	3400(1000~3770)
2630(940~3360)	3420(1000~3810)
2600	3400
6.1	
A++	
2100	2100
4	
A	
2000	
100	2100
1	1.2
51/47/43/35/32	51/47/43/35/32
60	60
41/37/33/25/22	41/37/33/25/22
50	50
Electrical Data	
220-240V~	

Out

165~

4.0(1.2~8.0)

5.8(1.5~9.0)

3.8(1.2~9.0)

5.1(1.5~10.0)

825(240~1380)

1130(290~1500)

767(240~1552)

1005(290~1720)

Refrigerating System

R3

Rot

Rechi

560/560

Cross

1180/1080/980/900/800/760/700

1120/1020/980/900/850/800/720

760

Propel

1700

1000/910/830/710/710

950/950/830/710/710

4×0.7

Capillary

3/8"

1/

Other

9~16

14~22

2

1

16-

Cooling:- 15-53/

Cooling:17-32,

790×275×192

712×276×459

8

22

860×345×265

765×310×481

10

24(w/o pipe), 25(w/i pipe)


342

Trade Terms

inner or more)

shipment (For orders meeting MOQ)


Accessories and Packaging for reference

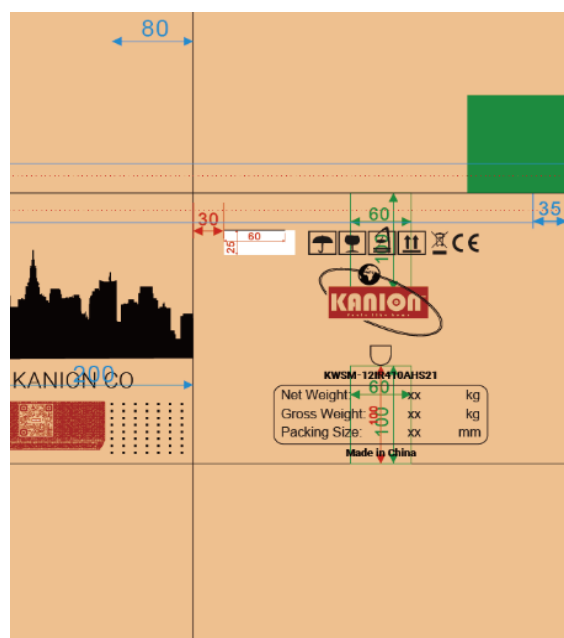




And It Feels Like Home!

Environment
AC Outstanding Features
Union Warranty

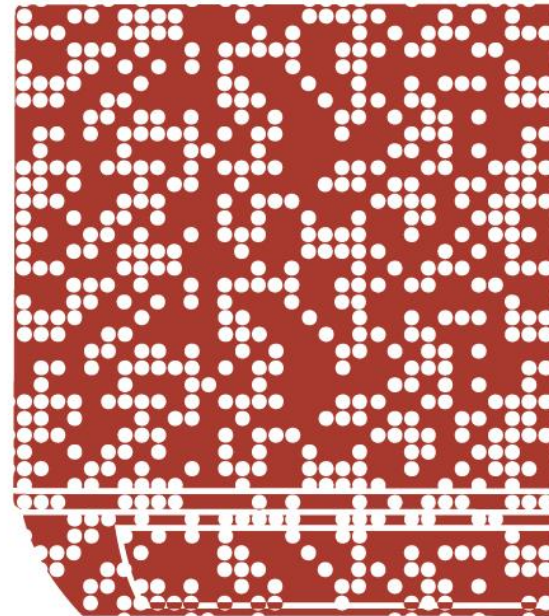



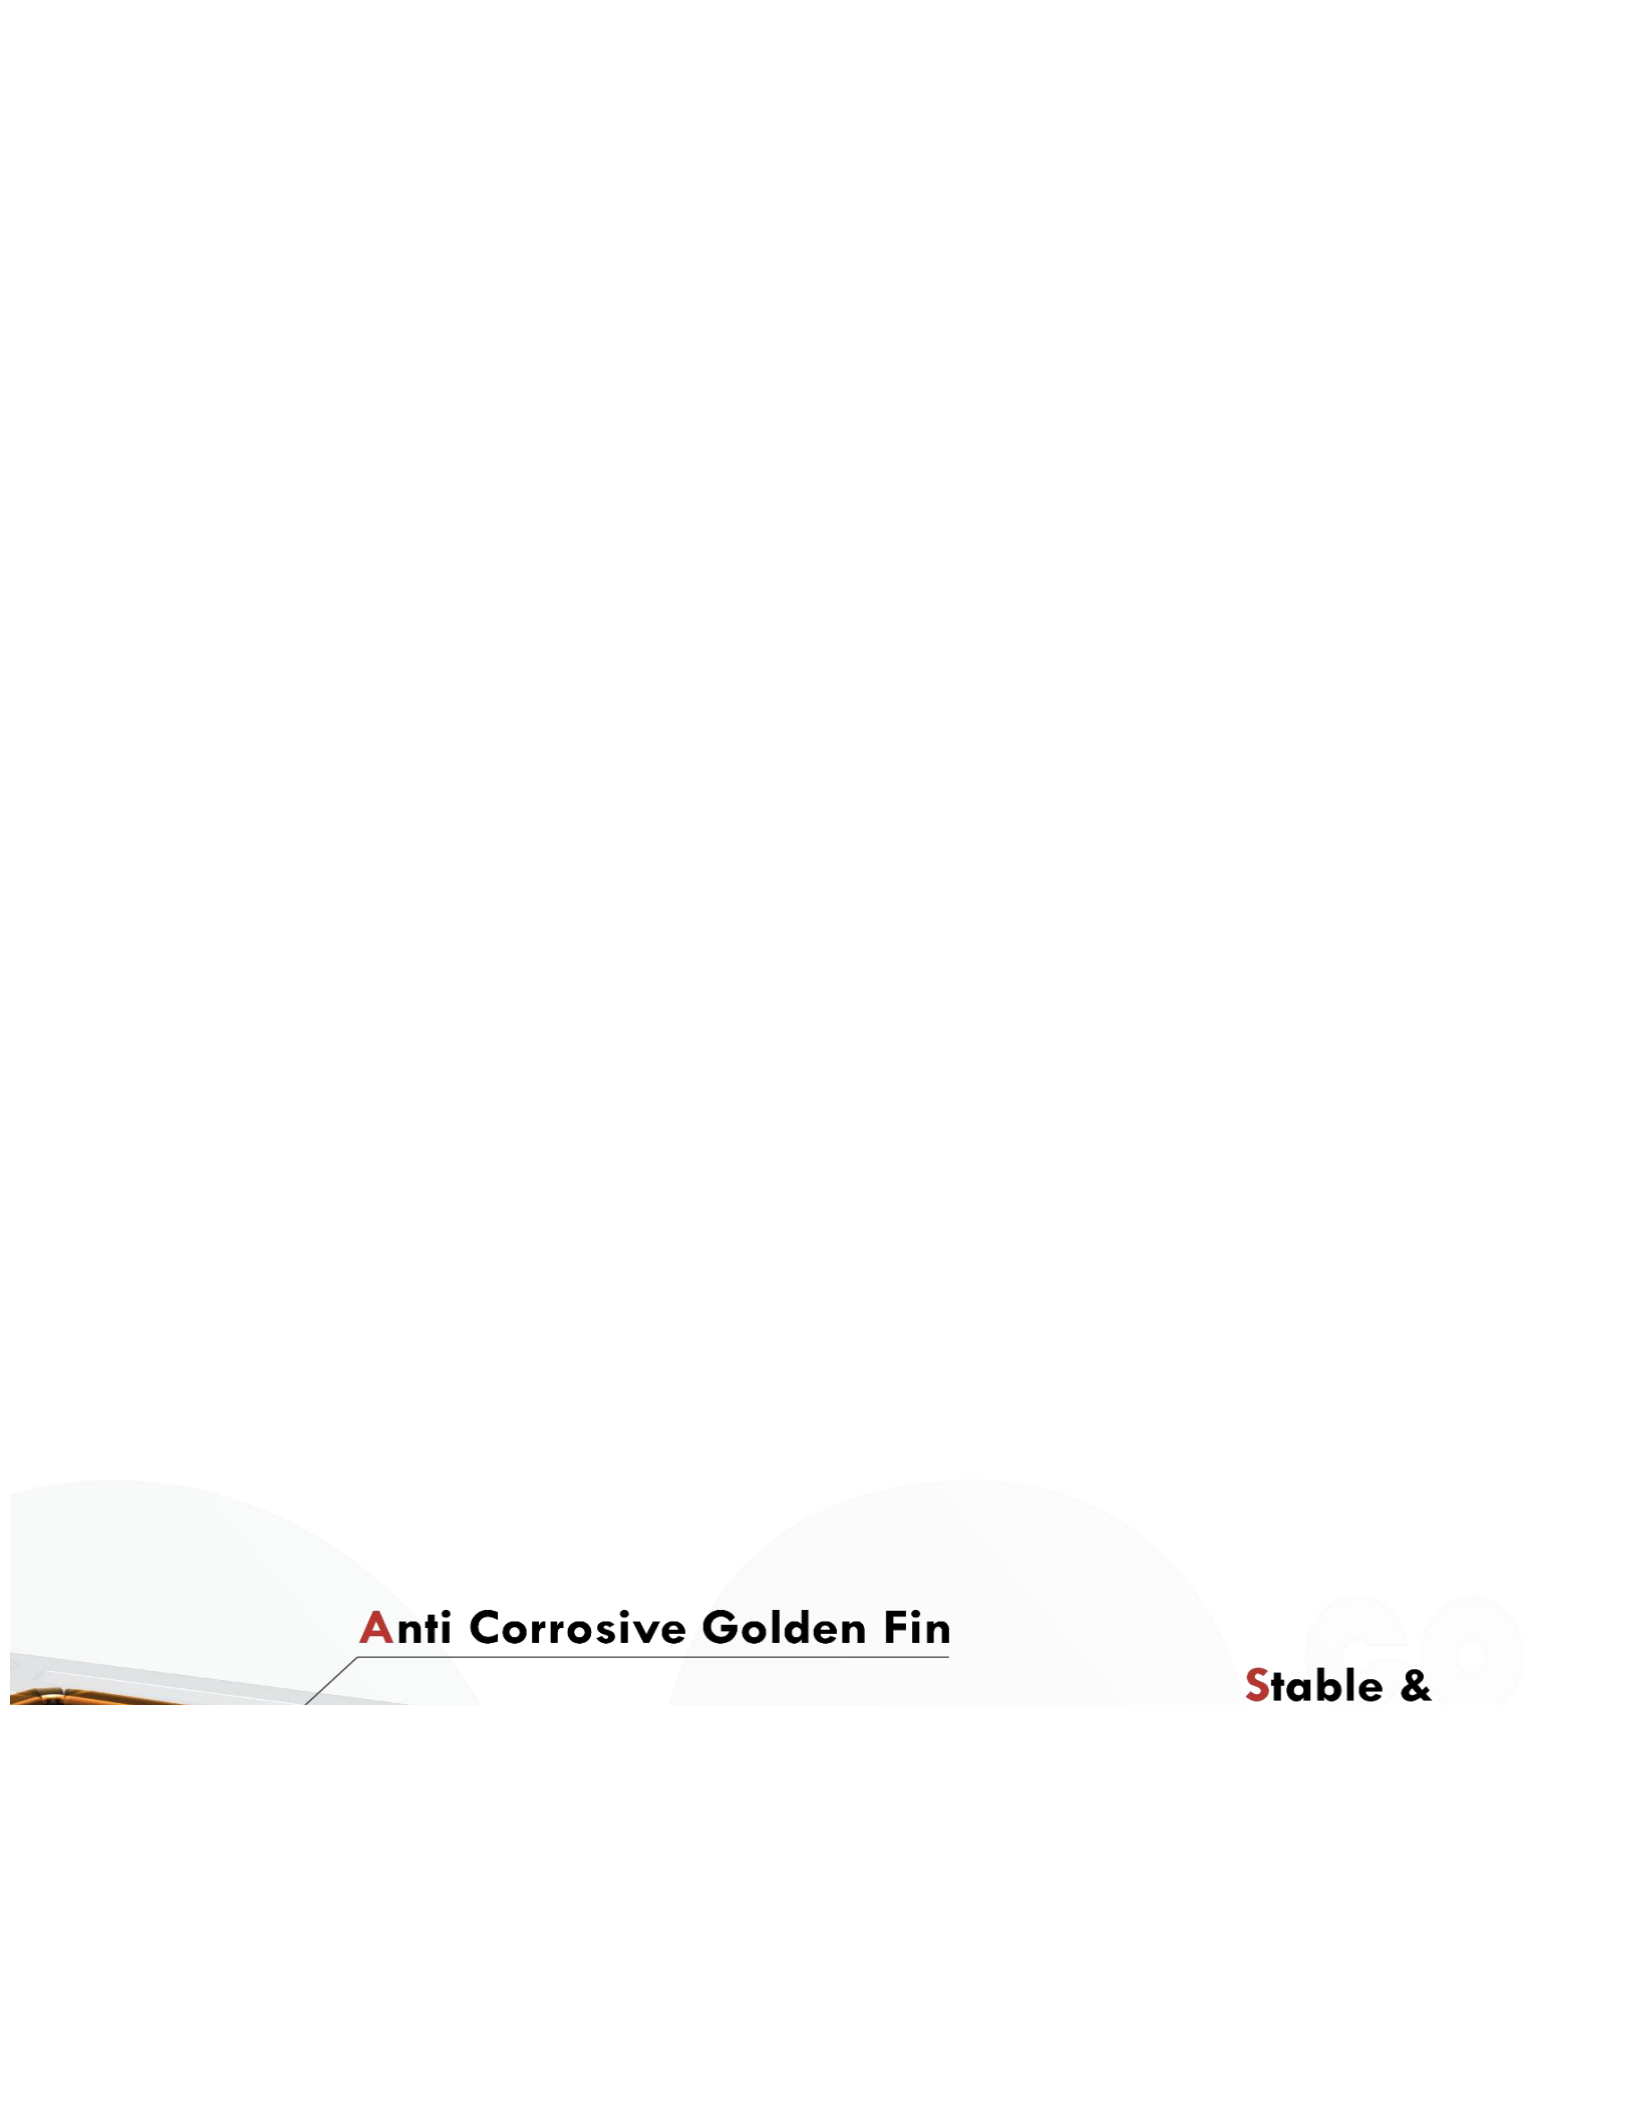


Anti Corrosive Golden Fin

Stable &

Powerful Motherboard

World Class Compressor

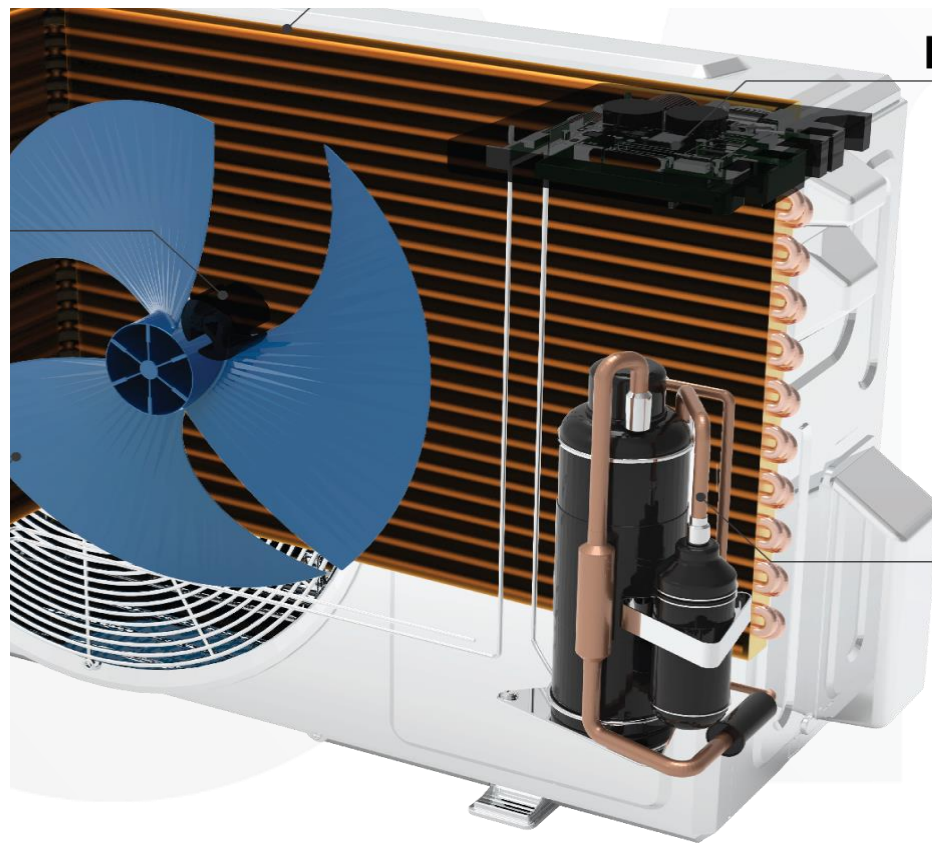

The final product may be different to the 3D model.



KWSM-18IR32HF	KWSM-24IR32HF
on Co	
Dehumidification	
DC Inverter 50Hz	
k Heating	
0V 50HZ	
compatible with all major A.I. voice assitants (Optional)	
forced high density filter	
corrosive coating	
5 years for compressor	
5100(1250-5900)	6840(1830~7820)
5130(1250-6080)	7050(1850~7960)
5100	6800
	6.5
-+	
3800	5700
4	
+	
3600	5300
200	400
1.5	1.8
54/50/47/43/36	58/52/48/44/41
65	68
43/41/38//35/27	47/42/38/34/31
55	57
~/50Hz/1P	

door

~265	
8.2(1.7~12.0)	9.8(2.3~13.0)
7.2(1.7~13.0)	8.6(2.3~14.0)
1574(330-2350)	2099(410~2800)
1382(340-2550)	1900(420~3000)

32

ary

GMCC	Sanyo
820/820	1100/1100
Flow	
1360/1230/1120/1030/950/870/800	1220/1130/1060/990/920/850/750
1360/1230/1120/1030/950/870/800	1220/1130/1070/1000/940/880/800
870	850

ler fan

2600	3000
910/830/710/630/550	860/820/720/620/450
910/830/710/630/450	860/820/720/620/450

5mm²

Electronic expansion valve	
	1/2"

4"

20~35		27~45	
5			
0			
.31			
'Heating:-20-30			
/Heating:0-30			
920×306×195		1100×333×222	
853×602×349		920×699×380	
11		14	
31		40	
990×380×265		1165×405×295	
890×628×385		960×732×400	
13		17	
34(w/o pipe), 36(w/i pipe)		43(w/o pipe), 46(w/i pipe)	
205		158	



